

PRODUCT CATALOG EDITION 6

Professional grade products for the building trades

PREFERREDCONSTRUCTIONPRODUCTS.COM



PreferredConstructionProducts® offers professional grade products for the building trades. Our family of companies include:





















BigGuyConstructionProducts®

a variety of blue chip components and parts for building trade wholesalers: floor sinks, expansion tanks, gas products, etc.

BigGuyGasDistributionProduct

speciaized products for high pressure gas distribution systems including gas regulators, risers, gas pipe and fittings.

BigGuyIrrigationProducts quality accesssory products for the irrigation and landscaping market

BigGuyToiletSeats[®] a selection of residential wood and commercial plastic toilet seats

BigGuyXpansionTanks®

expansion tanks products designed to maintain balance pressure in a water supply system

CraftedMetal®

metal building products from nail plates to access doors

DirectedAir[®] products for the HVAC market: fittings, condensate accessories, PTACs, support strap and cable ties, etc.

LabSafetySystems®

utility control systems for school science laboratories, classrooms and research facilities

LittleBuddyTools™ building trade tools


TailWindRepairParts™

replacement and OEM repair parts for premium brand water heaters, pumps and circulators, and plumbing fixtures.



PreferredConstructionProducts[®] reserves the right to correct any errors, inaccuracies or omissions and to change or update information at any time without prior notice.

Table of Contents

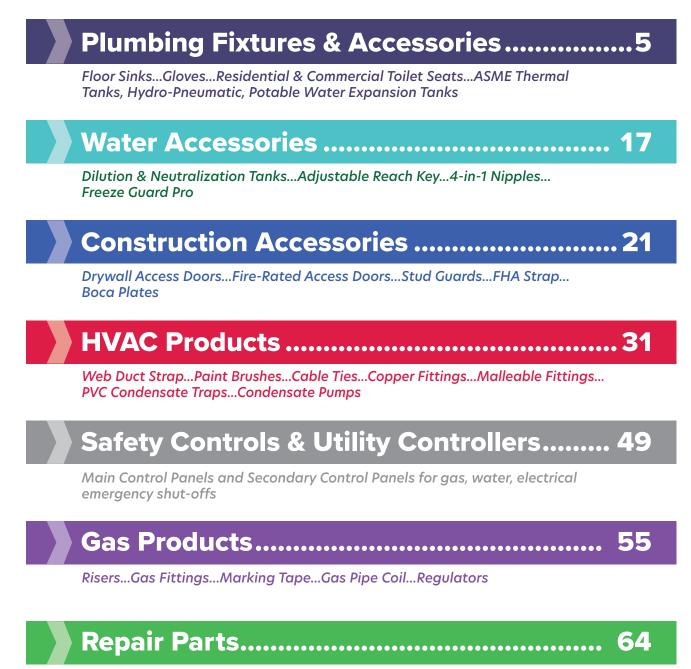

For Water Heaters...Pumps & Circulators...Plumbing Fixtures







a PreferredConstructionProducts®company

We have your residential and commercial building trade needs, in stock, in our state of the art warehouses!



Preferred Construc Products

6
7
8
10
12
14
15






Floor Sinks


DESCRIPTION:

BigGuy® offers 12" x 12" cast iron sanitary Floor Sinks with white acid-resistant porcelain coating. Aluminum dome interior bottom strainer included. Grate sold separately.

12" Square Floor Sink

ion	Item No.	Dimension	Drain Opening	Depth	Drain Outside Diameter
Ject	FS1212-6-2NH	2x12x12	2"	6"	2.35"
onr	FS1212-6-3NH	3x12x12	3"	6"	3.35"
P C	FS1212-6-4NH	4x12x12	4"	6"	4.38"
No-Hub Connection	FS1212-8-2NH	2x12x12	2"	8"	2.35"
Ž	FS1212-8-3NH	3x12x12	3"	8"	3.35"
	FS1212-8-4NH	4x12x12	4"	8"	4.38"
			ļ		
tion	Item No.	Dimension	Drain Opening	Depth	Drain Outside Diameter
nection	Item No. FS1212-6-2P	Dimension 2x12x12		Depth 6"	Outside
Connection			Opening	-	Outside Diameter
On Connection	FS1212-6-2P	2x12x12	Opening 2"	6"	Outside Diameter 3.35"
	FS1212-6-2P FS1212-6-3P	2x12x12 3x12x12	Opening 2" 3"	6" 6"	Outside Diameter 3.35" 4.45"
Push-On Connection	FS1212-6-2P FS1212-6-3P FS1212-6-4P	2x12x12 3x12x12 4x12x12	Opening 2" 3" 4"	6" 6" 6"	Outside Diameter 3.35" 4.45" 5.67"





FEATURES:

- 12" x 12" sanitary floor sink
- Cast iron with white acid-resistant porcelain coating
- Aluminum dome interior bottom strainer included.
- Grate sold separately

Grates for Floor Sink

Item No.	Description	Fits Dimension	Grate Dimension
FSG12	Full Grate	12x12	9x9
FSG12-1/2	Half Grate	12x12	9x9
FSG12-3/4	3/4 Grate	12x12	9x9

FEATURES:

- Loose set acid-resistant coated cast iron
- Optional nickel/bronze grate available
- Grates sold separately from Floor Sinks



Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.





Push-On compression coupling

-		
_		
	-	
-	-	
-		
	-	
	-	
C	C	
-	-	_

DESCRIPTION:

BigGuy[®] is offering heavy-duty, full hand coverage nitrile gloves made for safety, protection, and comfort in two styles for everyday use.

Gloves

FEATURES:

- **Black 6.5 MIL** with equal thickness across the entire glove surface for ultimate protection.
- Powder and latex free.
- Puncture, chemical and solvent resistant.
- Textured surface provides secure grip even when wet.
- Touch screen compatible.



a PreferredConstructionProducts®compa

Item #	Description	Color	Size	Box Qty	Boxes per Case
BG-RXE20232-B	6.5 Mil Nitrile Gloves	Black	Medium	100	10
BG-RXE20233-B	6.5 Mil Nitrile Gloves	Black	Large	100	10
BG-RXE20234-B	6.5 Mil Nitrile Gloves	Black	X-Large	100	10
BG-RXE20235-B	6.5 Mil Nitrile Gloves	Black	XX-Large	90	10

Sold only in case quantities.

FEATURES:

- Orange 8.5 Mil industrial grade gloves.
- Extra strong and durable protection.
- Puncture, chemical and contaminant protection.
- Raised diamond texture for superior grip while wet or greasy.
- Touch screen compatible.



Item #	Description	Color	Size	Box Qty	Boxes per Case
BG-RX50007	8.5 Mil Nitrile Gloves	Orange	Medium	100	10
BG-RX50008	8.5 Mil Nitrile Gloves	Orange	Large	100	10
BG-RX50009	8.5 Mil Nitrile Gloves	Orange	X-Large	100	10
BG-RX50010	8.5 Mil Nitrile Gloves	Orange	XX-Large	90	10

Sold only in case quantities.

Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.

Gloves

Made By: 😿 Raxwell



Residential Toilet Seats

DESCRIPTION:

BigGuyToiletSeats[®] for residential applications have molded wood construction and top-mounted hinges with non-corrosive plastic hardware.




Round Wood Toilet Seat

ltem No.	Description	Size	Color	Qty/ Case
1710-2 Round		17"	White	5
1710-EC-2	Round Economy	17"	White	6

FEATURES:

- 17" Round design
- Molded wood construction
- Multiple coats of enamel finish
- Top mounted hinges
- Non-corrosive plastic hardware
- White
- Regular design features sculpted full coverage lid with 4 bumpers and hinges with large mounting surface for greater stability
- Economy design features closed front with cover and 2 bumpers

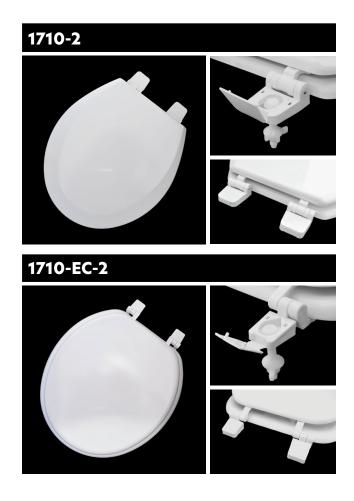



Residential Toilet Seats

the Butt S

DESCRIPTION:

BigGuyToiletSeats[®] for residential applications have molded wood construction and top-mounted hinges with non-corrosive plastic hardware.

Elongated Wood Toilet Seat

Item No.	Description	Size	Color	Qty/ Case
1910-2 Elongated		19"	White	5
1910-EC-2	Elongated Economy	19"	White	6

FEATURES:

- 19" Elongated design
- Molded wood construction
- Multiple coats of enamel finish
- Top mounted hinges
- Non-corrosive plastic hardware
- 4 bumpers
- White
- Regular design features sculpted full coverage lid and hinges with large mounting surface for greater stability
- Economy design features closed front with cover







Commercial Toilet Seats

DESCRIPTION:

BigGuyToiletSeats[®] for commercial applications have plastic construction and, unless specified, top-mounted hinges with non-corrosive plastic hardware.


Round Plastic Toilet Seat


Item No.	Description	Size	Qty/ Case
1720-2	Round	17"	5
1720-EZSC-2	Round, Easy Clean, Slow Close	17"	5

FEATURES:

- 17" Round design
- Plastic construction
- Closed front with cover
- Top mounted hinges with non-corrosive plastic hardware
- 4 molded bumpers
- White
- EZSC model features easy-to-clean hinges and a slow close seat









Commercial Toilet Seats

DESCRIPTION:

BigGuyToiletSeats[®] for commercial applications have plastic construction and, unless specified, top-mounted hinges with non-corrosive plastic hardware.

Elongated Plastic Toilet Seat: Closed Front

Item No.	Description	Size	Color	Qty/ Case
1920-2	Closed Front, Cover	19"	White	5
1920-EZSC-2	Closed Front, Cover, Easy Clean, Slow Close	19"	White	5

FEATURES:

- 19" Elongated design
- Plastic construction
- Closed front with cover
- 4 molded bumpers
- Top mounted hinges with non-corrosive plastic hardware
- White
- EZSC model features easy-to-clean hinges and a slow close seat

Elongated Plastic Toilet Seat: Open Front

Item No.	Description	Size	Color	Qty/ Case
19215-2	Open Front, No Cover	19"	White	5
19215-HD-2	Open Front, No Cover, Heavy Duty	19"	White	5

FEATURES:


- 19" Elongated design
- Plastic construction
- Open front without cover
- 4 molded bumpers
- Top mounted, stainless steel, self-sustaining hinges
- White
- HD model features heavy duty construction

Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.





PCP-CAT006-01042024 © 2024 PCP - All Rights Reserved





1920-EZSC-2





19215-HD-2

Thermal Expansion Tanks

BigGuy[®] through Calefactio offers a wide variety of thermal expansion tanks designs with fixed bladders and removeable bladders that range in capacity from less than two gallons to over 1,800 gallons. Both ASME and Non ASME tanks are offered and some tanks offer ExpanView indicator which changes color if a leak is detected.



ASME Thermal Expansion Tanks:

FEATURES:

- Water remains permanently separated from air.
- Conforms to ASME, Section VII.
- Bottom & Top connection available.



AL Series





ALT Series



OT Series





Model	Description	ASME	Connection	Gallons	Max Temperature	Max PSI
AL Series	Replaceable Bladder	ASME	Bottom	10-1320	240° F	150/175/250/300
ALT Series	Replaceable Bladder	ASME	Тор	10-1981	240° F	150/175/250/300
OT Series	Fixed Bladder	ASME	Тор	7-211	240° F	150/250/300
NA Series	No Bladder	ASME	-	15-525	450° F	125/150



Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.

PCP-CAT006-01042024 © 2024 PCP - All Rights Reserved

Potable Expansion Tanks

>>>XPANSION I ANN

Made by: 🔥 CALEFACTIO

BigGuy[®] through Calefactio offers a wide variety of potable thermal expansion tank designs with fixed bladders and replaceable bladders that range in capacity from less than two gallons to over 500 gallons. Both ASME and Non ASME tanks are offered with various connection features.

POTABLE Expansion Tanks:

FEATURES:

- Both ASME and Non ASME tanks available
- Water remains permanently separated from air.
- Stainless steel connections
- Conforms to NSF61 standards.
- Air pre-charged to factory to 40 / 50 PSI
- FTTE-C series promotes movement of water across tank to avoid water stagnation and prevents bacteria growth.



Model BFA-12



Model TXA-85



FTTE-C



HGTE & HGTV

Model	Description	ASME	Connection	Gallons	Max Temperature	Max PSI
BFA Series	Fixed Bladder	ASME	Тор	3.5-90	240° F	175/250/300
TXA Series	Replaceable Bladder	ASME	Bottom	10-528	240° F	175/250/300
FTTE-C Series	Replaceable Bladder	ASME	Flow through	23-211	240° F	150/200/250
HGTE Series	Fixed Bladder	Non ASME	Тор	3.2-8	200° F	150 PSI
HGTV Series	Replaceable Bladder	Non ASME	Bottom	14-74	200° F	150 PSI
FTTE Series	No Bladder	Non ASME	Flow through	2.1-8	200° F	150 PSI

Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.

PCP-CAT006-01042024 © 2024 PCP - All Rights Reserved



HYDRO-Pneumatic Tanks

DESCRIPTION:

BigGuy[®] through Calefactio offers hydro-pneumatic tanks designed to deliver water under pressure between pump cycles to provide sufficient flow to meet demands. Tanks are designed to quickly accept water surge pressures with minimal pressure drop to prevent water hammer shock.

HYDRO-Pneumatic Tanks:

FEATURES:

- Ultra resistant bladder.
- ABM Series is equipped with biogas vent and manometer.
- Air pre-charged at factory.
- ExpanView indicator available on SSA /AFX Series.



AFX Model-85

SSA Series

ABM Series

FX Series

Model	Description	ASME	Connection	Gallons	Max Temperature	Max PSI
AFX Series	Replaceable Bladder	ASME	Bottom	10-1320	240° F	125 PSI
SSA Series	Replaceable Bladder	ASME	Bottom	10-660	240° F	250 PSI
ABM Series	Replaceable Bladder	ASME	Bottom	43-528	240° F	150 PSI
FX Series	Replaceable Bladder	Non ASME	Bottom	80-528	240° F	150 PSI





Potable Water Expansion Tanks

DESCRIPTION:

BigGuyXpansionTanks[®] absorb any increased volume of water created by thermal expansion and maintain balanced pressure throughout a potable water supply system, such as water heaters and hot water storage tanks.

Potable Water Expansion Tanks

ltem No.	Tank Volume	Connection	Diameter	Length	Pallet Quantity
BG-PXT-5	2.1 Gallons	3/4" male	8"	12"	80
BG-PXT-12	4.5 Gallons	3/4" male	11"	155"	36

FEATURES:

- Absorbs water caused by thermal expansion
- Returns water to the system when hot water is used
- Prevents dangerous pressure buildup
- Stops wasted energy, dripping faucets, toilet valve running, intermittent and pressure relief valve discharge
- Protects water heater, appliances, and fixtures
- Drawn steel construction
- Flexible butyl diaphragm separating the air chamber from the water chamber
- Stainless steel connector
- Certified for maximum temperature of 200°F and maximum pressure of 150 psi





>>>XPANSIONTANKS





Potable Water Tankless Expansion Tanks

DESCRIPTION:

BigGuyXpansionTanks® through Elbi offers a thermal expansion tank for a tankless water heater.

Potable Water Tankless Expansion Tanks

FEATURES:

- Designed to absorb thermal expansion and pressure surges from tankless water heater than have 2 gallons or less of water volumne
- Pre-set factory pressure at 50 PSI
- Constructed of 304 stainless steel
- 1/2" MPT connection
- Maximum design pressure of 145 PSI
- Maximum design temperature of 210°F
- Tested and approved by IAPMO to NSF 61 standard for potable water



Made by:

>>>XPANSIONTANKS(((

& elli

ltem No.	Description	Case Pack
BG-12-TWH-2	Tankless water heater expansion tank with air value - stainless steel pre-set at 50 PSI	1/24

Sold only in case quantities.





Dilution and Neutralization Tanks	18
Adjustable Reach Key	19
4-in-1 Cut-Off Nipple	20
Freeze Guard Pro	21





Dilution & Neutralization Tanks

DESCRIPTION:

BigGuy[®]/ORION[®] tanks are designed to facilitate the dilution and neutralization of corrosive liquid waste so it is suitable for discharge into the sanitary sewer system, protecting the environment from contamination and downstream piping systems from chemical corrosion.

FEATURES:

- Lightweight and easy to install
- Wide standard size range
- Custom configurations with respect to inlet, outlet, vent size, location and style
- Custom lid type with respect to plastic or plastic/metal combination; load bearing or non-load bearing; bolted, welded, or combination
- Custom access port type, size and location, including manholes and easy access gamma ports for inspection and limestone filling
- Fiberglass reinforced (FRP) models available
- Minimum maintenance
- High impact and high stress cracking resistance
- Where dilution alone is not sufficient for neutralization, limestone chips may be added to some models



















Adjustable Reach Key

DESCRIPTION:

The LittleBuddyTools™ T-handle valve key allows for an easy and safe way to t off water valves in hard to reach places. Designed to be fully adjustable, dura convenient, and compact.

Item No.	Description	Adjustable Length	I I
A100	Standard Key	3.5' - 6.5'	
A100-CS	Standard Key/Curbstop Adapter	3.5' - 6.5'	
A100-CS,WH	Standard Key/Curbstop Adapter/ Wheel Handle	3.5' - 6.5'	-
A100-WH	Standard Key/Wheel Handle	3.5' - 6.5'	
A100-HD	Heavy Duty with Standard Key	3.5' - 6.5'	
A200	Standard Key	5.5' - 9.5'	
A200-CS	Standard Key/Curbstop Adapter	5.5' - 9.5'	
A200-CS,WH	Standard Key/Curbstop Adapter/ Wheel Handle	5.5' - 9.5'	
A200-WH	Standard Key/Wheel Handle	5.5' - 9.5'	2″
A200-HD	Heavy Duty with Standard Key	5.5' - 9.5'	<u>e</u>
A500	Standard Key	5.5' - 14'	Stand Curb S
A1000	Standard Key	Custom	Standard Key Curb Stop Ada

FEATURES:

- Fully adjustable
- Includes breakdown handle •


- TOUGH RUGGED -

BUDDY

TOOLS

Made by: Adjustable Reach key

- **Positive action Snap-Lock** • Rings securely hold the Adjustable-Reach KEY in any fixed position
- Folds down to a compact size to fit in trunk, under the seat, or behind pickup bench seats so you don't have to worry about the key hanging out of truck beds or the possibility of theft



Preferred Construction Products

THE WHOLESALER'S 5

19

Accessories

ccessories		ADJR C
Item No.	Description	ADJR CS2
ADJR CS	Curb Stop Adapter	ADJR WH
ADJR CS2	Curb Stop Adapter for 2" Curb Stops	
ADJR WH	Wheel Handle Adapter	ADJR VBC
ADJR VBC	Valve Box Cleaner Adapter	
ADJR PINS	Snap Lock Pins for A100 & A200	ADJR PINS
ADJR PINS A500	Snap Lock Pins for A500	
ADJR HANDLE	Handle	ADJR PINS A500
ADJR HANDLE-CS	Handle with Curb Stop	

Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.

PCP-CAT006-01042024 © 2024 PCP - All Rights Reserved

4-in-1 Cut-Off Nipple

DESCRIPTION:

High Density Polyethylene 6" Male Threaded Nipple that can be easily cut to multiple desired lengths for sprinkler connection to lateral water pipelines.



FEATURES:

- 4-in-1 nipple with multiple length option from 1" to 6"
- Available in 1/2" and 3/4" MIPT
- Reducing nipple available from 3/4" to 1/2"
- Saves on inventory costs with 4-in-1 design



PART NUMBER	DESCRIPTION	BAG QTY	ΒΟΧ QTY*
BG-M481-005	1/2" x 6" 4-in-1 Cut-Off Nipple	50	350
BG-M481-007	3/4" x 6" 4-in-1 Cut-Off Nipple	25	300
BG-M481-101	1/2" x 3/4" x 6" 4-in-1 Cut-Off Nipple	50	300

Sold only in case quantities.



Freeze Guard Pro

DESCRIPTION:

Insulated Heavy Duty Cross Contection Device bag made from durable PVC vinyl material that provides protection from extreme weather.





IRRIGATION PRODUC a PreferredConstructionProducts®company



FEATURES:

- Made of durable PVC vinyl
 - Long lasting
 - Waterproof
 - 2-Year UV rated
 - Tear resistant
- Thick interior R12 insulation provides protection from extreme weather
- Double stitched seams
- Velcro[®] seal at base of bag to prevent harmful cold air drafts and easy sealing
- Brass grommet at the base for secure attachment to equipment
- Available in two sizes





PART NUMBER	DESCRIPTION	BAG QTY	ΒΟΧ QTY*
BG-24x24-GRN	24" x 24" Heavy Duty Insulated Bag Green	1	10
BG-34x24-GRN	34" x 24" Heavy Duty Insulated Bag Green	1	10

Sold only in case quantities.







CommercialAccessDoors[™], a division of CraftedMetal[®], offers drywall and fire-rated access doors for all your construction needs.

Commercial Cartered Access Doors C A D o o r s



GAUGEMETAL STAMPINGS

GaugeMetalStampings[™], a division of CraftedMetal[®], offers various metal straps and plates, most completely customizable to your needs.

Use CraftedMetal[®] products for all of your construction needs.



Drywall Access Doors	24
Fire Rated Access Doors	25
Stud Guards	26
FHA Straps	27
BOCA Plates	28





Drywall Access Doors

DESCRIPTION:

CADoors drywall doors are 16-gauge steel access doors designed to provide secure and easy access to plumbing, electrical wiring or other utility applications behind walls.

Drywall Access Doors

Item No.	Description	Box Quantity
PC 6.6 SDL	Prime Coat 6" x 6"	1
PC 8.8 SDL	Prime Coat 8" x 8"	1
PC 10.10 SDL	Prime Coat 10" x 10"	1
PC 12.12 SDL	Prime Coat 12" x 12"	1
PC 14.14 SDL	Prime Coat 14" x 14"	1
PC 16.16 SDL	Prime Coat 16" x 16"	1
PC 18.18 SDL	Prime Coat 18" x 18"	1
PC 24.24 SDL	Prime Coat 24" x 24"	1

FEATURES:


- CADoors are constructed from 16 gauge steel
- CADoors are prime coated with a white, low sheen finish allowing for easier secondary painting
- Anti flex frame with tabs or bolt holes for easy installation
- Screwdriver operated latch

ALSO AVAILABLE:

- Optional stainless steel finish
- Cylinder lock
- Other sizes available on request



Stainless Steel Option

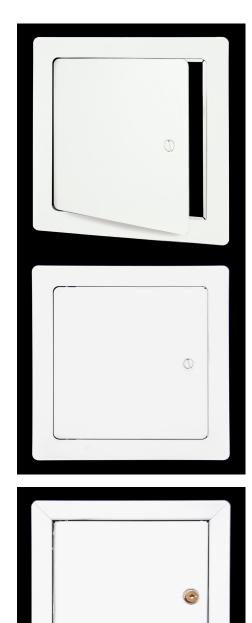

Commercial Carrent Access Doors C A D o o r s

Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.

Cylinder Lock Option

Fire-Rated Access Doors

Commercial Carrent Access Doors C A D o o r s

DESCRIPTION:

CADoors fire-rated doors are 16-gauge galvanized steel access doors designed to provide secure and easy access to plumbing, electrical wiring or other utility applications behind walls. They stand up to immense heat in emergency situations.

Fire-Rated Access Doors

Item No.	Description	Box Quantity
FR 8.8 RTL	Prime Coat 8" x 8"	1
FR 12.12 RTL	Prime Coat 12" x 12"	1
FR 14.14 RTL	Prime Coat 14" x 14"	1
FR 16.16 RTL	Prime Coat 16" x 16"	1
FR 18.18 RTL	Prime Coat 18" x 18"	1
FR 24.24 RTL	Prime Coat 24" x 24"	1

FEATURES:

- CADoors are constructed from 16 gauge galvannealed steel
- CADoors are prime coated with a white, low sheen finish allowing for easier secondary painting
- Fire rated for 1.5 hours "B" label (wall) and 3 hours Warnock-Hersey (ceiling) and meets ANSI-UL 10B standards
- Heavy duty spring closer with interior latch release slide
- Recessed turn latch

ALSO AVAILABLE:

- Optional stainless steel finish
- Optional white prime coat finish
- Cylinder lock
- Other sizes available on request





Stud Guards

DESCRIPTION:


GaugeMetalStampings[™] Stud Guards are short bands of metal attached to wall studs to prevent nails from penetrating and damaging pipes or wiring. GaugeMetalStampings[™] Stud Guards are self-nailing and have end prongs.

Stud Guards


Item No.	Size	Gauge	Box Quantity
15SG0318	1.5" x 3"	18	100
15SG0516	1.5" X 5"	16	100
15SG0518	1.5" X 5"	18	100
15SG0616	1.5" X 6"	16	100
15SG0618	1.5" X 6"	18	100
15SG0916	1.5" X 9"	16	100
15SG1216	1.5" X 12"	16	100
15SG1816	1.5" X 18"	16	100

Other sizes available.



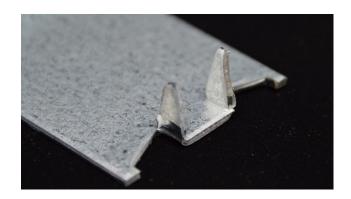

GAUGEMETAL STAMPINGS





FHA Straps

DESCRIPTION:


GaugeMetalStampings[™] FHA Straps (or anchors) are straps of 16 gauge steel that tie two building elements together to secure the entire system.

1.5" FHA Straps

Item No.	Size	Gauge	Holes	Box Quantity
15F0616-6	1.5" x 6"	16	6	100
15F0916-6	1.5" x 9"	16	6	100
15F1216-6	1.5" x 12"	16	6	100
15F1816-6	1.5" x 18"	16	6	100

Custom sizes and hole patterns available.






3" FHA Straps

Item No.	Size	Gauge	Holes	Box Quantity
3B0616-6	3" x 6"	16	6	100
3B0916-6	3" x 9"	16	6	50
3B1216-6	3" x 12"	16	6	50
3B1816-6	3" x 18"	16	6	50

Custom sizes and hole patterns available.







BOCA Plates

DESCRIPTION:


GaugeMetalStampings[™] BOCA plates attach to wall studs to prevent nails from penetrating and damaging pipes or wiring. They can also reinforce stud joists. Choose from standard flat plates or self-nailing.

Self Nailing BOCA Plates

Item No.	Size	Gauge	Box Quantity
3BSN0616	3" x 6"	16	50
5BSN0516	5" x 5"	16	50
5BSN0616	5" x 6"	16	50
5BSN0816	5" x 8"	16	50

Custom sizes and hole patterns available.



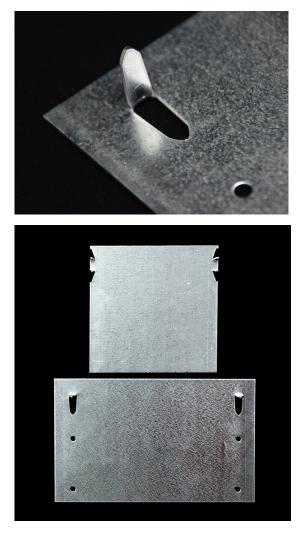

GAUGEMETAL STAMPINGS CRAFTED METAL



BOCA Plates

GAUGEMETAL STAMPINGS

CRAFTEDMETAL

DESCRIPTION:


GaugeMetalStampings[™] BOCA plates attach to wall studs to prevent nails from penetrating and damaging pipes or wiring. They can also reinforce stud joists. Choose from standard flat plates or self-nailing.

Standard BOCA Plates

ltem No.	Size	Gauge	Holes	Box Quantity
5B0816	5" x 8"	16	6	50
5B0916-6	5" x 9"	16	6	50
5B0916-16	5" x 9"	16	16	50
5B1216-16	5" x 12"	16	16	50
5B1816-16	5" x 18"	16	16	25
5B1216-12	5" x 12"	16	12	50
6B0616-12F	6" x 6"	16	12	50
6B0916-12F	6" x 9"	16	12	50
6B1216-12F	6" x 12"	16	12	50
6B1816-12F	6" x 18"	16	12	25
6B2416-12F	6" x 24"	16	12	25
6B0616-16G	6" x 6"	16	16	50
6B0916-16G	6" x 9"	16	16	50
6B1216-16G	6" x 12"	16	16	50
6B1816-16G	6" x 18"	16	16	25

Custom sizes and hole patterns available.





6B G/16 Hole




5B 0816/6 Hole




5B 0916/6 Hole




5B 1216/12 Hole



5B 1216/16 Hole





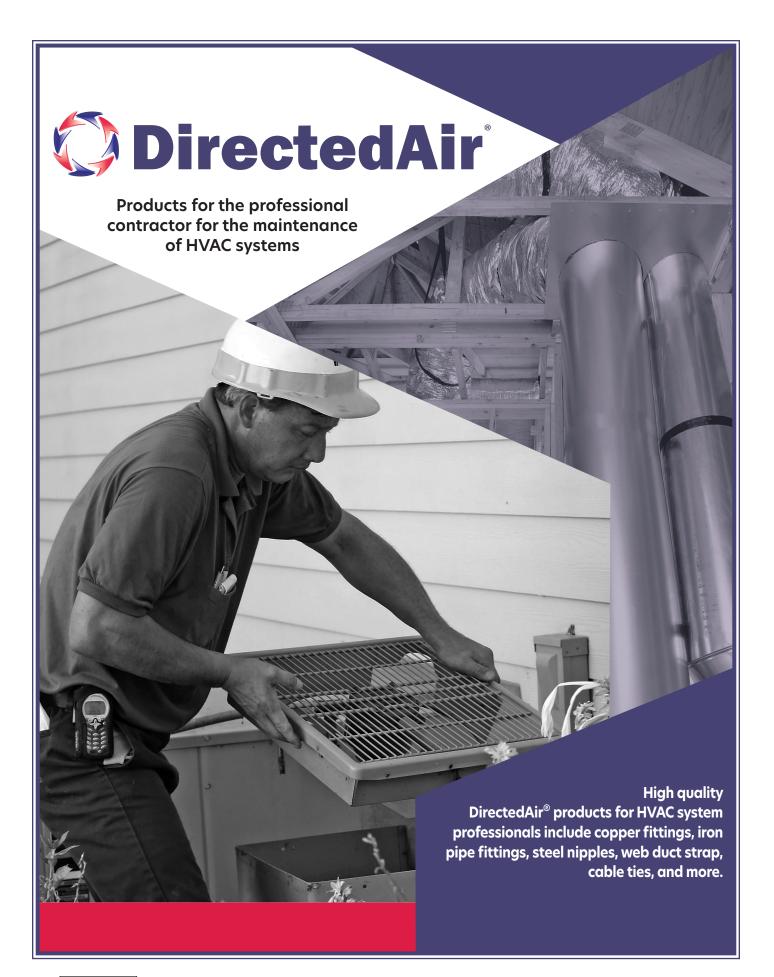



Web Duct Support Strap	32
Bristle Paint Brush	32
Cable Ties	33
Copper Fittings	34
Black Iron Pipe Fittings	38
Black Steel Nipples	39
PVC Condensate Traps	40
Condensate Pumps	4 1
Large/High Capacity	42
Shallow Pan	43
Peristaltic/Evaporative	44
Mini-Split/ Ductless	45
Accessories	46





HVAC Products HVAC Accessories

DirectedAir

Web Duct Support Strap

DESCRIPTION:

DirectedAir[®] flexible woven mesh Web Duct Support Strap is a low cost and easy to install method of hanging flex ducting. Conforms to any size and can be secured with nails or staples. Easy to cut with scissors or knife.

Item No.	Size	Tensile Strength	Color	Yards/ Roll	Rolls/ Case
DA06-1.75-K	1.75"	360 lbs.	Black	100	24
DA06-3-K	3"	638 lbs.	Black	100	8
DA06-3-SV	3"	638 lbs.	Silver	100	8

Sold in case quantities only.

FEATURES:

- Woven polypropylene monofilament material
- 1.75" and 3" sizes
- Conforms to UL standards
- Quick installation using nails or staples
- Easier to install than metal hanging strap



Bristle Paint Brush

Item No.	Size	Pcs/ Box	Boxes/ Case
DA200	2"	12	30

Paint brushes sold in case quantities only - 360 pcs. per case.

FEATURES:

- Aspen handle with hole for hanging
- Natural bristles
- 2" Width





Cable Ties



Cable Ties

DESCRIPTION:

DirectedAir® cable ties aid the HVAC professional with duct support, secure tie-down of duct, etc. Cable ties lock tightly to avoid slipping, stretching or sliding.

FEATURES:

- UL flame rated V-2
- UL listed
- Natural nylon color
- -40°F to 185°F

Item No.	Size	Tensile Strength	Color	Max Bundle Diameter	Pcs/ Bag	Bags/ Case	Cases/ Pallet
DA05-36-175-L-N	36"	175 lbs.	Natural	10-3/8"	50	10	30





Copper Fittings

DESCRIPTION:

DirectedAir[®] copper fittings are manufactured to the highest standards of quality and fully certified to industry standards for dimensions and material composition.

DirectedAir

FEATURES:

- ISO C9001, ISO 14001 certified
- ASME B16.22
- NSF/ANSI 61
- Fittings sold in full bag or case quantities only



Elbows

45°	Item No.	OD Size	Pcs/ Bag	Pcs/ Case	45° Street	Item No.	OD Size	Pcs/ Bag	Pcs/ Case		
Copper to Copper	DA014-04	3/8"	25	5000	Fitting to	DA014S-04	3/8"	25	3000		
(CxC)	DA014-05	1/2"	25	2000	Copper (FxC)	DA014S-05	1/2"	25	2000		
	DA014-06	5/8"	25	1300	(FXC)	DA014S-06	5/8"	25	1300		
	DA014-07	3/4"	25	700		DA014S-07	3/4"	25	700		
	DA014-08	7/8"	25	500		18	18	DA014S-08	7/8"	25	500
	DA014-11	1-1/8"	10	240		DA014S-11	1-1/8"	10	240		
	DA014-14	1-3/8"	10	150		DA014S-14	1-3/8"	5	150		
	DA014-16	1-5/8"	10	100		DA014S-16	1-5/8"	5	100		
	DA014-21	2-1/8"	5	40							





Copper Fittings

DirectedAir

DESCRIPTION:

DirectedAir® copper fittings are manufactured to the highest standards of quality and fully certified to industry standards for dimensions and material composition.

Elbows (cont.)

		Pcs/	Pcs/	
Item No.	OD Size	Bag	Case	
DA019-03	1/4"	100	5000	
DA019-04	3/8"	25	4000	
DA019-05	1/2"	25	2000	
DA019-06	5/8"	50	1200	
DA019-07	3/4"	25	600	
DA019-08	7/8"	25	400	
DA019-11	1-1/8"	10	200	
DA019-14	1-3/8"	10	120	
	DA019-03 DA019-04 DA019-05 DA019-06 DA019-07 DA019-08 DA019-11	DA019-031/4"DA019-043/8"DA019-051/2"DA019-065/8"DA019-073/4"DA019-087/8"DA019-111-1/8"	Item No. OD Size Bag DA019-03 1/4" 100 DA019-04 3/8" 25 DA019-05 1/2" 25 DA019-06 5/8" 50 DA019-07 3/4" 25 DA019-08 7/8" 25 DA019-11 1-1/8" 10	Item No. OD Size Bag Case DA019-03 1/4" 100 5000 DA019-04 3/8" 25 4000 DA019-05 1/2" 25 2000 DA019-06 5/8" 50 1200 DA019-07 3/4" 25 600 DA019-08 7/8" 25 400

90° Street	ltem No.	OD Size	Pcs/ Bag	Pcs/ Case
Fitting to	DA019S-04	3/8"	25	3000
Copper	DA019S-05	1/2"	25	2000
(FxC)	DA019S-06	5/8"	25	1200
	DA019S-07	3/4"	25	600
	DA019S-08	7/8"	10	400
	DA019S-11	1-1/8"	10	200

90° Long	Item No.	OD Size	Pcs/ Bag	Pcs/ Case	
Radius	DA019LT-03	1/4"	100	4000	
Copper to	DA019LT-04	3/8"	25	3000	
Copper	DA019LT-05	1/2"	25	1500	
(CxC)	DA019LT-06	5/8"	25	800	
	DA019LT-07	3/4"	25	450	
	DA019LT-08	7/8"	20	240	
	DA019LT-11	1-1/8"	10	120	
	DA019LT-14	1-3/8"	5	80	
	DA019LT-16	1-5/8"	2	40	
	DA019LT-21	2-1/8"	2	20	

90° Street Long Radius	ltem No.	OD Size	Pcs/ Bag	Pcs/ Case
	DA019SLT-03	1/4"	25	3000
Fitting to	DA019SLT-04	3/8"	25	2000
Copper (FxC)	DA019SLT-05	1/2"	25	1500
	DA019SLT-06	5/8"	25	800
	DA019SLT-07	3/4"	25	450
	DA019SLT-08	7/8"	10	250
	DA019SLT-11	1-1/8"	10	120
	DA019SLT-14	1-3/8"	5	80
	DA019SLT-16	1-5/8"	5	40

Adapters

Male	Item No.	OD Size	Pcs/ Bag	Pcs/ Case
	DA10M-07x07	3/4" x 3/4"	10	500
	DA10M-08x07	7/8" x 3/4"	25	500
	DA10M-11x10	1-1/8" x 1"	10	300

Adapters

Female			Pcs/	Pcs/
	Item No.	OD Size	Bag	Case
	DA10F-06x05	5/8" x 1/2"	50	400
	DA10F-07x07	3/4" x 3/4"	10	300
	DA10F-08x07	7/8" x 3/4"	10	250
	DA10F-11x10	1-1/8" x 1"	5	250



35

Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.

PCP-CAT006-01042024 © 2024 PCP - All Rights Reserved

Copper Fittings

DESCRIPTION:

DirectedAir[®] copper fittings are manufactured to the highest standards of quality and fully certified to industry standards for dimensions and material composition.

🗘 DirectedAir

Couplings

w/ Roll Stop	Item No.	OD Size	Pcs/ Bag	Pcs/ Case
Copper to Copper (CxC)	DA03RS-03	1/4"	100	10000
	DA03RS-04	3/8"	100	5000
	DA03RS-05	1/2"	25	3000
	DA03RS-06	5/8"	25	1600
	DA03RS-07	3/4"	25	1000
	DA03RS-08	7/8"	25	600
	DA03RS-11	1-1/8"	10	300
	DA03RS-14	1-3/8"	10	200
	DA03RS-16	1-5/8"	10	120
	DA03RS-21	2-1/8"	5	60

Fitting Reducers (Bushings)

	Item No.	OD Size	Pcs/ Bag	Pcs/ Case
Fitting to	DA05R-04x03	3/8" x 1/4"	25	5000
Copper	DA05R-05x04	1/2" x 3/8"	25	3000
(FxC)	DA05R-06x05	5/8" x 1/2"	25	1800
4	DA05R-07x05	3/4" x 1/2"	25	1200
	DA05R-07x06	3/4" x 5/8"	25	1100
	DA05R-08x07	7/8" x 3/4"	25	800
	DA05R-11x07	1-1/8" x 3/4"	10	400
	DA05R-11x08	1-1/8" x 7/8"	10	400
	DA05R-14x08	1-3/8" x 7/8"	10	250
	DA05R-14x11	1-3/8" x 1-1/8"	10	250

Couplings

Reducing			Pcs/	Pcs/	
Copper to	Item No.	OD Size	Bag	Case	
Copper to	DA03R-04x03	3/8" x 1/4"	25	5000	
(CxC)	DA03R-05x03	1/2" x 1/4"	100	3000	
	DA03R-05x04	1/2" x 3/8"	100	3000	
	DA03R-06x04	5/8" x 3/8"	25	2000	
	DA03R-06x05	5/8" x 1/2"	25	2000	
	DA03R-07x05	3/4" x 1/2"	25	1100	
	DA03R-07x06	3/4" x 5/8"	25	1000	
	DA03R-08x04	7/8" x 3/8"	50	800	
	DA03R-08x06	7/8" x 5/8"	25	600	
	DA03R-08x07	7/8" x 3/4"	25	600	
	DA03R-11x05	1-1/8" x 1/2"	25	500	
	DA03R-11x06	1-1/8" x 5/8"	25	400	
	DA03R-11x07	1-1/8" x 3/4"	25	400	
	DA03R-11x08	1-1/8" x 7/8"	10	400	
	DA03R-14x08	1-3/8" x 7/8"	10	250	





Copper Fittings

DESCRIPTION:

DirectedAir[®] copper fittings are manufactured to the highest standards of quality and fully certified to industry standards for dimensions and material composition.

DirectedAir

Tees

	Item No.	OD Size	Pcs/ Bag	Pcs/ Case
Copper to	DA02R-03	1/4"	100	5000
Copper to	DA02R-04	3/8"	100	4000
Copper	DA02R-05	1/2"	100	1000
(CxCxC)	DA02R-06	5/8"	25	700
	DA02R-07	3/4"	20	400
	DA02R-08	7/8"	10	250
	DA02R-11	1-1/8"	10	120
	DA02R-14	1-3/8"	5	70
	DA02R-16	1-5/8"	2	50

Tube Caps

	Item No.	OD Size	Pcs/ Bag	Pcs/ Case
	DA04-04	3/8"	100	5000
2	DA04-06	5/8"	100	2000
	DA04-07	3/4"	50	1500
	DA04-08	7/8"	50	1000
	DA04-11	1-1/8"	50	500
	DA04-14	1-3/8"	25	300
	DA04-16	1-5/8"	10	240

P-Traps



ltem No.	OD Size	Pcs/ Bag	Pcs/ Case
DA12-06	5/8"	1	80
DA12-07	3/4"	1	40
DA12-08	7/8"	1	30
DA12-11	1-1/8"	1	20



Preferred Construction Products'

37

Black Iron Pipe Fittings

DESCRIPTION:

DirectedAir[®] Black Iron Pipe Fittings are manufactured to the highest standards of quality and fully certified to industry standards for dimensions and material compos Offered in a variety of sizes to allow for application in a number of settings.



Black Iron Pipe Fittings

Item No.	Size	Description	Pcs/Box	Pcs/Case
DAB014-05	1/2"	45 Elbow	50	200
DAB014-07	3/4"	45 Elbow	40	120
DAB019-05	1/2"	90 Elbow	50	200
DAB019-07	3/4"	90 Elbow	35	105
DAB019S-05	1/2"	90 Street Elbow	60	180
DAB019S-07	3/4"	90 Street Elbow	35	105
DAB02-05	1/2"	Тее	40	120
DAB02-07	3/4"	Тее	35	70
DAB02R-07x05x05	3/4" x 1/2" x 1/2"	Reducing Tee	30	120
DAB02R-07x05x07	3/4" x 1/2" x 3/4"	Reducing Tee	40	80
DAB03-05	1/2"	Coupling	60	240
DAB03-07	3/4"	Coupling	50	150
DAB03R-07x05	3/4" x 1/2"	Reducer Coupling	60	180
DAB04-05	1/2"	Сар	75	300
DAB04-07	3/4"	Сар	40	160
DAB07-07x05	3/4" x 1/2"	Hex Bushing	50	200
DAB08-05	1/2"	Union-Brass Seat	50	100
DAB08-07	3/4"	Union-Brass Seat	35	70
DAB09-01	1/8"	Pipe Plug	400	4800
DAB09-05	1/2"	Pipe Plug	50	600
DAB09-07	3/4"	Pipe Plug	30	360

FITTING FEATURES:

- Class 150
- Material conforms to ASTM A-197
- Pressure Rating: Fittings: ANSI/ASME B16.3 Bushings/Plugs: ANSI/ASME B16.14
- All fittings 100% pressure tested at factory
- ISO 9000: 2001
- Other sizes and types available
- Fittings sold in full box or case quantities only









DESCRIPTION:

DirectedAir[®] Black Steel Nipples are manufactured to the highest standards of quali and fully certified to industry standards for dimensions and material composition. Offered in a variety of sizes to allow for application in a number of settings.

🗘 DirectedAir

Black Steel Nipples

Marine Mar	C :	Laurath	D (D	Deslower	Marris Mar	C :	L	D (D	Deslower
Item No.	Size	Length	Pcs/Box	Pcs/Case	Item No.	Size	Length	Pcs/Box	Pcs/Case
DABN-05xC	1/2"	Close	25	400	DABN-07xC	3/4"	Close	25	400
DABN-05x15	1/2"	1-1/2"	25	400	DABN-07x15	3/4"	1-1/2"	25	400
DABN-05x20	1/2"	2"	25	400	DABN-07x20	3/4"	2"	25	300
DABN-05x25	1/2"	2-1/2"	25	300	DABN-07x25	3/4"	2-1/2"	25	300
DABN-05x30	1/2"	3"	25	300	DABN-07x30	3/4"	3"	25	200
DABN-05x35	1/2"	3-1/2"	25	300	DABN-07x35	3/4"	3-1/2"	25	200
DABN-05x40	1/2"	4"	25	200	DABN-07x40	3/4"	4"	25	150
DABN-05x45	1/2"	4-1/2"	25	200	DABN-07x45	3/4"	4-1/2"	25	150
DABN-05x50	1/2"	5"	25	200	DABN-07x50	3/4"	5"	25	100
DABN-05x55	1/2"	5-1/2"	25	200	DABN-07x55	3/4"	5-1/2"	25	100
DABN-05x60	1/2"	6"	25	200	DABN-07x60	3/4"	6"	25	100
DABN-05x70	1/2"	7"	25	100	DABN-07x70	3/4"	7"	25	75
DABN-05x80	1/2"	8"	25	100	DABN-07x80	3/4"	8"	25	75
DABN-05x90	1/2"	9"	25	100	DABN-07x90	3/4"	9"	25	50
DABN-05x100	1/2"	10"	25	50	DABN-07x100	3/4"	10"	25	50
DABN-05x110	1/2"	11"	25	100	DABN-07x110	3/4"	11"	25	50
DABN-05x120	1/2"	12"	25	50	DABN-07x120	3/4"	12"	25	50
DABN-05x180	1/2"	18"	0	25	DABN-07x180	3/4"	18"	0	25
DABN-05x240	1/2"	24"	0	5	DABN-07x240	3/4"	24"	0	5
DABN-05x300	1/2"	30"	0	5	DABN-07x300	3/4"	30"	0	5
DABN-05x360	1/2"	36"	0	5	DABN-07x360	3/4"	36"	0	5
DABN-05x480	1/2"	48"	0	5	DABN-07x480	3/4"	48"	0	5
DABN-05x600	1/2"	60"	0	5	DABN-07x600	3/4"	60"	0	5
DABN-05x720	1/2"	72"	0	5	DABN-07x720	3/4"	72"	0	5

NIPPLE FEATURES:

- Schedule 40
- Meets or exceeds all applicable ASTM and ANSI standards
- Threaded both ends
- Other sizes and types available
- Fittings sold in full box or case quantities only



Preferred Construction Products

39

Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.

PCP-CAT006-01042024 © 2024 PCP - All Rights Reserved

PVC Condensate Traps

DESCRIPTION:

Condensate Traps are the standard for draining condensate water from HVAC systems and keep units from drawing in outside air. DirectedAir[®] PVC Traps prevent air leaks, allowing condensation to drain, and result in a properly working system.




PVC Condensate Traps

	ltem No.	Size	Description	Pcs/ Bag	Pcs/ Case
Α.	DA3075P	3/4"	P-type trap	10	120
В.	DA3075J	3/4"	J-type trap	10	100
C.	DA3075R	3/4"	R-type (running) trap	10	180

FEATURES:

- PVC schedule 40 pipe
- 3/4" NPT
- Slip connection
- Full flow capacity





Condensate Pumps

Little GIANT.

Sold only in Texas, New Mexico and Oklahoma

Franklin Electric

DESCRIPTION:

Designed for automatic collection/removal of condensate from air conditioning, refrigeration and dehumidification equipment when gravity drainage is not possible. Also suitable for high efficiency oil and gas-fired condensing furnace and condensing boiler equipment.

VCMA-Pro Series

FEATURES:

- Slim footprint design
- 1/30 hp high-perfor,ance motor
- ABS tank, motor cover, and volute
- Stainless steel motor shaft
- Fully automatic start/stop and safety switch operations
- Thermally protected fan-cooled motor
- "Anti-sweat" tank sleeve included on selected models and available separately for all others
- CSA certified to US and Canada standards



Item No.	Model	НР	Volts	Hz	Cord	Flow	20' 3/8" Tubing	Overflow Detection Switch	
554620	VCMA-20UL-PRO	1/30	115	60	6'	84 GPH @ 1 ft	No	No	
554621	VCMA-20ULS-PRO	1/30	230	50/60	6'	78 GPH @ 1 ft	No	Yes	
554630	VCMA-20ULS-PRO	1/30	115	60	6'	84 GPH @ 1 ft	No	Yes	
554631	VCMA-20ULS-PRO	1/30	230	50/60	6'	78 GPH @ 1 ft	No	Yes	
Model wi	th Tubing								
554650	VCMA-20ULST-PRO	1/30	115	60	6'	84 GPH @ 1 ft	Yes	Yes	
554431	VCMA-20ULST-PRO	1/30	230	50/60	6'	80 GPH @ 1 ft	Yes	Yes	
Model wi	Model with Anti-Sweat Sleeve								
554642	VCMA-20ULS-C-PRO	1/30	115	60	6'	84 GPH @ 1 ft	No	Yes	

VCMA 15/20 Series


FEATURES:

- ABS tank, motor cover, and volute
- 1/2 gallon tank
- Stainless steel motor shaft
- Removable 3/8" barbed check valve
- 3 inlet drain holes

- Thermal overload protection
- Auto start/stop
- Tubing and safety switch options
- cCSAus listed



ltem No.	Model	НР	Volts	Hz	Cord	Flow	20' 3/8" Tubing	Overflow Detection Switch
554401	VCMA-15UL	1/50	115	60	6'	65 GPH @ 1 ft	No	No
554405	VCMA-15ULS	1/50	115	60	6'	65 GPH @ 1 ft	No	Yes
554425	VCMA-20ULS	1/30	115	60	6'	80 GPH @ 1 ft	No	Yes
Model wi	th Tubing							
554411	VCMA-15ULT	1/50	115	60	6'	65 GPH @ 1 ft	Yes	No
554415	VCMA-15ULST	1/50	115	60	6'	65 GPH @ 1 ft	Yes	Yes
554435	VCMA-20ULST	1/30	115	60	6'	80 GPH @ 1 ft	Yes	Yes
554461	VCMA-20ULST	1/30	230	60	6'	80 GPH @ 1 ft	Yes	Yes





Condensate Pumps

DESCRIPTION:

Designed for automatic collection/removal of condensate from air conditioning, refrigeration and dehumidification equipment when gravity drainage is not possible Also suitable for high efficiency oil and gas-fired condensing furnace and condensing boiler equipment.

Little GIANT. R Franklin Electric

Sold only in Texas, New Mexico and Oklahoma

VCCA 20 Series

FEATURES:

- Low profile for small spaces
- 1/30 hp motor
- Float switch for automatic start/stop operation

•	Saf	ety	swi	tc	h

- 1/2 gallon tank capacity
- Motor thermal overload protection

Item No.	Model	НР	Volts	Hz	Cord	Flow	20' 3/8" Tubing	Overflow Detection Switch				
554201101	VCCA-20ULS	1/30	115	60	6'	80 GPH @ 1 ft	No	Yes				
554202101	VCCA-20ULS	1/30	230	60	6'	80 GPH @ 1 ft	No	Yes				

VCCA 20-P Series

FEATURES:

- For plenum applications with restricted space
- 1/30 hp motor
- 1-3/4" low-profile tank height
- Stainless steel motor shaft
- Maximizes HVAC system performance and safety
- UL 2043 Plenum Rated



Item No.	Model	НР	Volts	Hz	Cord	Flow	20' 3/8" Tubing	Overflow Detection Switch
554221101	VCCA-20-P	1/30	115	60	6'	80 GPH @ 1 ft	No	Yes
554222101	VCCA-20-P	1/30	230	50/60	6'	80 GPH @ 1 ft	No	Yes

VCL 14/24/45 Series - Large Tank Applications

FEATURES:

- 1 gallon tank
- Stainless steel motor shaft
- Auto start/stop

- 3/8" barbed discharge adapter
- Two 1-1/8" inlet openings
- Thermal overload protection
- Fan cooled concentric (14/24), PSC (45) motor 10.4 psi
- Overflow dual-function detection switch
- cCSAus listed

ltem No.	Model	НР	Volts	Hz	Amps	Watts	Shut- Off (ft)	PSI	20' 3/8" Tubing	Safety Switch		
553101	VCL-14ULS	1/50	115	60	1	78	14	6.1	No	Yes		
553201	VCL-24ULS	1/18	115	60	2.5	148	24	10.4	No	Yes		
553211	VCL-24ULS	1/18	230	50/60	1.2	148	24	10.4	No	Yes		
553240	VCL-45ULS	1/5	115	60	3.5	185	45	19.5	No	Yes		
553245	VCL-45ULS	1/5	230	50/60	1	250	45	19.5	No	Yes		
Safety Sv	Safety Switch and Tubing Model											
14940372	VCL-24ULS*	1/18	230	50/60	1.2	148	24	10.4	Yes	Yes		









LittleGIANT

Sold only in Texas, New Mexico and Oklahoma

Franklin Electric

Condensate Pumps - Shallow Pan MCCUApplications

DESCRIPTION:

The ABS series utilizes a sealed, submersible pump and is ideal for in-pan placement for condensate removal. An integrated unique float switch design assures reliability and security while providing easy access to the float for servicing.

FEATURES:

- Permanently lubricated motor bearingsEpoxy-coated cast aluminum housing
- Easy to remove float housing
- Includes removable inlet filter screen
- cCSAus listed

1 ABS - Shallow Pan Applications

• Automatic on/off operation

ADDITIONAL FEATURES:

- Submersible pump with sump-type pick-up
- Includes 90° 1/4" MNPT adapter
- Low on/off levels will operate in most standard condensate drain pans

Item No.	Model	НР	Volts	Hz	Amps	Watts	Shut- Off (ft)	PSI
550521	1-ABS	1/150	115	60	1.1	70	10	4.3
550532	1-ABS	1/150	230	50/60	0.6/0.5	70	10	4.3
550522	1-ABS w/Tank	1/150	115	60	1.1	70	10	4.3



3 ABS - Shallow Pan Applications

ADDITIONAL FEATURES:

- Submersible pump with collection tank
- Ideal for self contained, high volume, high head condensate removal
- 1 gallon tank
- Galvanized steel tank cover 1-1/8" openings
- 1/2" MNPT pump discharge with brass check valve and compression fitting for 1/2" OD copper or rigid plastic tubing
- Powerful 1/12 hp pump motor

Item No.	Model	HP	Volts	Hz	Amps	Watts	Shut- Off (ft)	PSI
551320	3-ABS	1/12	115	60	3.5	210	26	11.2
551330	3-ABS	1/12	230	50/60	1.8/1.6	210	26	11.2





Condensate Pumps - Peristaltic / Evaporative Applications

DESCRIPTION:

Little Giant offers condensate pumps for high temperatures requirements with the HT-VCL Series and the CP series for evaporative cooler pumps.



Sold only in Texas, New Mexico and Oklahoma

HT-VCL-P Series

DESCRIPTION

These pumps are rated up to 212° F and are designed for use in plenum applications. These pumps are ideal for steam humidifiers and boiler applications. This Series is compliant with UL standard UL2043.

FEATURES:

- Ideal for stem humidifiers or boiler applications
- 1/8 or 1/3 horsepower motor
- 1-gallon collection tank
- Stainless steel motor shaft

- Masimizes HVAC system performance and safetv
- Rated for water temperatures up to 212° F (100° C) • UL 2043 plenum rated



Item No.	Model	НР	Volts	Amps	Watts	Flow	PSI
553130101	HT-VCL-30-P	1/8	115	1.4	134	350 GPH @ 5 ft	13.9
553130102	HT-VCL-30-P	1/8	208-230	0.7	90	350 GPH @ 5 ft	13.9
553130104	HT-VCL-30-P	1/8	277	0.6	81	350 GPH @ 5 ft	13.9
553130101	HT-VCL-30-P	1/8	115	3.5	292	575 GPH @ 5 ft	26.9
553130102	HT-VCL-30-P	1/8	208-230	1.8	300	575 GPH @ 5 ft	26.9
553130104	HT-VCL-30-P	1/8	380-460 IPH	1.0	300	575 GPH @ 5 ft	26.9

CP Series - Evaporative Applications

DESCRIPTION

For use in evaporative coolers, sales displays, laboratories, water bath circulation and many other uses. Ideal as a universal OEM replacement pump.

FEATURES:

- Concentric fan-cooled double coil motor
- Flame retardant housing
- Thermal overload protection
- Corrosion resistant steel shaft

- Snap off volute plate for easy cleaning

0.56

Shut-Item No. Model HP Volts Hz Amps Watts Off (ft) PSI 540005 CP-1-115 1/70 115/127 60 0.8 70 9.5 4.1 540015 CP-1-230 1/70 50/60 230 0.4 70 9.5 4.1 541005 1/50 60 1.0 80 11 4.8 CP2-115 115 541015 CP-2-230 1/50 115230 50/60 0.5 80 11 4.8 542005 CP-3-115 1/30 115 60 1.1 90 12 5.2 542015 1/30 50/60

230





CP3-230

Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.

12

5.2

90

Condensate Pumps - Mini-Split/Ductless Applications

DESCRIPTION:

The EC-1 series removes condensate from wall mount, ductless mini-split units. Can also be used to remove condensate from fans coils. Pump can be installed above the unit in false or suspended ceiling, behind the wall mount air handler, or in plastic conduit or line-set channel.

FEATURES:

- **Pump/Controller:**
- Noise reducing design
- Easy to install brackets
- Reliable solid state switching technology
- Quick connect for pump to reservoir communications cable
- Quick connect for power cable
- 1/4" pump discharge outlet

Reservoir

- Hall effect on/off level sensors with high water safety sensor feature
- Extra large filter screen
- Hinged cover with quick release latch
- Clear tank for inspection and monitoring
- Top/Front/Back options for reservoir to pump connections
- Multi-step drain hose adapter

EC1 Series - Mini-Split/Ductless Applications

EC-1-DV ADDITIONAL FEATURES:

• Pump is capable of operating from a wide range of supply voltage to maintain consistent pump performance.

EC-1K/1K-DV ADDITIONAL FEATURES:

• Includes Line Set Kit for mounting the pump on the interior wall, next to the indoor ductless mini-split unit. Provides space to install the EC-1-DV, line-set pipes, electrical wiring and drain hoses providing a clean finished look.

LINE SET KIT FEATURES:

- Right or left installation
- Cover provides dedicated positions for mounting pump and reservoir in secure and easy service locations
- Room inside duct for Line Set and wiring
- Generous room in lower elbow to easily bend Line Set pipes
- 2.1"x3" inside dimensions
- 9.7" drain hose tubing
- Detachable power cord
- Wall fasteners included
- 42" max length from reservoir enclosure to ceiling

Item No.	Model	Volts	Hz	Discharge Size	Shut- Off (ft)	Suction Lift (ft)
553507	EC-1-DV	110-240	50/60	1/4"	33	3
553517	EC-1K-DV	110-240	50/60	1/4"	33	3

RESERVOIR AND PUMP



Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.

LittleGIANT.

Sold only in Texas, New Mexico and Oklahoma



LINE SET KIT

EC-1-DV/EC-1K-DV with cover



EC-1-DV/EC-1K-DV inside view



Condensate Pumps - Commercial Ice Maker Pump / Pump Accessories

DESCRIPTION:

Little Giant offers pumps for other application needs and condensate pump accessories.



Sold only in Texas, New Mexico and Oklahoma

RIM-U Series

DESCRIPTION:

Commercial ice machine universal replacement water pump

FEATURES:

- Dual voltage
- Moisture proof windins
- Pump easily disassemblies for instaling and serving
- Multiple impellers included to match most US-made ice machine



Item No.	Model	HP	Volts	Nz	Discharge Sizes	Lead Wire Ft
545600	RIM-U	1/25	115/230	50/60	1/2", 5/8", 3/4", 1", 5/8" O.D.	3

ACS 2 and ACS 3 - Condensate Overflow Switches

Switches install in AC drain pan to shut off unit if condensate level approaches overflow.

Item No.	Model	HP	Volts	Amps	Lead Length
599122	ACS-2		48	5	18"
599123	ACS-2		48	5	72"
599124	ACS-3	1/3 max	125-250	11	72"



ACS 4 and ACS 5 - In Line Drain Switches

Switches used as secondary condensate drain overflow detection. Includes 3/4" PVC drain pan fittings.

Item No.	Model	Volts	Amps	Lead Length
599125	ACS-4	24	5	
599123	ACS-2	24	5	72"



TUBING

Item No.	Model	Description	
599107	T-3/8	100' of 3/8" ID x 1/2" OD clear tubing	





DISTRIBUTIONGROUP

the premier construction products warehousing partner





First and Foremost is Service

Dependable, courteous, and responsive. Our goal is 100% customer satisfaction.

Warehouse Operations

System engineered for maximum productivity, cost reduction, short order fulfillment times, and increased customer satisfaction.

Services

We can tailor a program to meet a customer's specific requirements, needs, and goals. Our policies and procedures are structured around those of our manufacturers and customers.

Transportation Operations

Most orders ship same day and arrive within one day to our customers. Primary local same day courier services are available.

Exclusive warehousing source and distribution center for PreferredConstructionProducts®









Lab Safety is not just our name... It's our whole purpose.



LabSafetySystems[®] is a provider of factory assembled, tested and UL 508A certified utility control systems for science laboratories or other instructional, research and medical facilities. These utilities include domestic water, natural gas and electricity to convenience outlets. LabSafetySystems[®] products are designed to give maximum flexibility in control of facility utilities both for convenience and freedom from the potential hazards of accidents or malicious mischief.

They utilize Siemens[™] industrial grade, field programmable logic controllers (PLC) that allow for easy programming updates in the field should your requirements change over time.

LabSafetySystems[®] utility control systems offer the architect and engineering design team a full range of system components, all of which are customizable to meet your most demanding requirements as well as relevant codes and standards. Our systems are tailored to your project specific needs.



All LabSafetySystems $^{\odot}$ products are factory assembled and certified to meet UL 508A standards.



Main Control Panels	50
Secondary Panels	52



Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.

Preferred Construction Products THEWHOLESALER'S SOUTHER

PCP-CAT006-01042024 © 2024 PCP - All Rights Reserved

Main Control Panels

DESCRIPTION:

The Main Utility Control Panel (UCP) is a safety device that regulates the availability of various utilities and devices in single or multiple laboratories. These can include domestic water, natural gas and electric outlets within a science laboratory or other instructional facilities as well as research and medical facilities. Fully customizable to meet project specific needs.

Series	Description	Panel Finish	Utility Switches/ Lights
CSS-UCP-S	Single Laboratory	PC or SS	For each utility
CSS-UCP-D	Dual Laboratory	PC or SS	For each utility
CSS-UCP-TS	Touch Screen *single panel controls up to 6 labs	PC or SS	Up to 4 utilities
CSS-UCP-EP-S	Integrated Electric Panel - Single Laboratory	PC or SS	For each utility
CSS-UCP-EP-D	Integrated Electric Panel - Dual Laboratories	PC or SS	For each utility
CSS-UCP-TS-EP	Touch Screen & Integrated Electric Panel	PC or SS	Up to 4 utilities
CSS-USCP	Solenoid	PC	One for all utilities
CSS-USCP-WIFI	WIFI Ready Solenoid	PC	N/A





Single Lab UCP



Dual Lab UCP



- Programmable logic controller (PLC) by Siemens™ Controls
- Keyed selector switch restricting the activation of utilities to the key holder
- Indicator lights showing enabled systems
- Emergency stop buttons
- Panel finishes available in white powder coat or stainless steel, as indicated
- Optional integrated electrical panel
- Optional connections to building's alarm system and/or management system
- Optional remote capabilities, fan controls, HMI touch screen controls
- Five year limited parts warranty (with factory start-up)



eferred

50







CSS-USCP External & Internal

Main Control Panels

Installation Photos





hot water, gas and electricity) at student workstations. The utility control panels are in communication with the school's building management systems. Electric panels provide the on/off function for electric outlets and solenoid panels provide on/off function for fluids. Additional features include a stainless steel finish, fan enable/disable capability and a remote panic panel.



CSS-USCP-3-D-D-B-120AC-PC-B-KL-S utility solenoid control systems from LabSafetySystems® were installed by Pasadena ISD at Pasadena Memorial Early College to regulate the availability of cold water, hot water and gas at the student workstations. These systems are designed to meet NSTA and TES standards for control of the selected utilities. Keyed access limits control of these systems to the classroom instructors. Additional features include wye strainers for water service and a remote panic panel.

Alvin Career & Tech Ed Center Manvel, TX



In the Career and Technical Educational Center, Alvin ISD installed LabSafetySystems® CSS-UCP-TS-2-4U-PC-ESM utility control systems to regulate the availability of 4 utilities (cold water, hot water, gas and electricity) at the student workstations. An HMI touch screen regulates the utilities at two classrooms. Additional features include solenoid panels, electric panels, remote panic panels, flow monitoring at the emergency showers, and remote alarm beacon lights with audible alarms. Solenoid panels are constructed with ASCO water and fuel gas solenoid valves.



All LabSafetySystems® products are factory assembled and certified to meet



All LabSafetySystems® solenoid panels are assembled to meet CSA certification

Preferred

Construction Products

51

Secondary Panels

DESCRIPTION:

Secondary Panels house the required mechanics of a system and work in combination with the LabSafetySystems[®] Main Control Panels. These Secondary Panels include Solenoid Panels for hot and cold domestic water and natural gas; Electric Panels to house the electric contractors, Remote Panic Panels and Gas Detection Panels. Secondary Panels are fully assembled and are pre-tested for use with the LabSafetySystems[®] Main Control Panels. Custom options are available.

LabSafetySystems

Solenoid Panel

The Solenoid Panel (SP) houses the solenoid values that regulate the availability of cold water, hot water, or natural gas at student workstations. Panels are pre-assembled and sized based on project design criteria. The factory supplied ASCO[™] solenoids are UL Listed, CSA Certified and FM Approved.



The Electrical Panel (EP) houses the electric contractors which provide regulated electric service at the student workstations. The EP can be a separate panel or an integral part of the Main Utility Control Panel.

Limited Access Control Panel


The Limited Access Control Panel (LACP) is a pre-assembled control panel designed to provide utility service to an individual prep station or teacher's demo table. This panel provides control of water and gas only. A keyed selector switch restricts the ability to activate the utility services to the key holder.




onstru

52

All LabSafetySystems[®] products are factory assembled and certified to meet UL standards.









Secondary Panels

DESCRIPTION:

Secondary Panels house the required mechanics of a system and work in combination with the LabSafetySystems[®] Main Control Panels. These Secondary Panels include Solenoid Panels for hot and cold domestic water and natural gas; Electric Panels to house the electric contractors, Remote Panic Panels and Gas Detection Panels. Secondary Panels are fully assembled and are pre-tested for use with the LabSafetySystems[®] Main Control Panels. Custom options are available.

Remote Light Array

The Remote Light Array (RA) is a pre-assembled light array which operates in combination with the LabSafetySystems[®] UCP to provide a remote and visual display of the operational status for the system utility circuits or an alarm condition upon emergency shutdown.

Remote Panic Panel

The Remote Panic Panel (RP) gives the instructor the ability to shut down the entire system with the touch of a button.

Gas Detection Panel

The Gas Detection Panel (GD) deactivates system utilities upon detection of a gas leak. The white powder coated panel includes a flashing red indicator which illuminates upon gas detection and and on/off yellow indicator which illuminates upon system shutdown.













Risers	56
Con-Stab Fittings & Tools	58
LYCOFIT [®] Fitting & Tools	59
Underground Marking Tape & Wire	60
Pipe	61
Regulators	62





Risers

DESCRIPTION:

BigGuy[®] riser options are available for a variety of residential and commercial gas applications. Risers offer a safe and simple method for connecting and transitioning from the PE pipe below the ground to the above ground piping system.




Anodeless Risers

Item No.	Pipe Size MPT	Vertical Dimension	Con-Stab Coupling
A3434	3/4"	24"	No
A3430	3/4"	30"	No
A3436	3/4"	36"	No
A124	1"	24"	No
A130	1"	30"	No
A11430	1-1/4"	30"	No
A11436	1-1/4"	36"	No
A11230	1-1/2"	30"	No
A11236	1-1/2"	36"	No
A230	2"	30"	No
A236	2"	36"	No
A3430C	3/4"	30"	Yes
A130C	1"	30"	Yes
A11430C	1-1/4"	30"	Yes
A11236C	1-1/2"	36"	Yes

Available in additional sizes.

FEATURES:

- Epoxy Coated Steel Casing is electrostatic bonded coating providing long-term underground corrosion protection.
- Casing is TIG welded to adapter for a stronger and higher quality welder joint.
- Every part is leak tested.
- Meets or exceeds all ASTM 02513 Category 1 and NFPA-58 requirements.
- Available with Con-Stab coupling attached.





Risers

DESCRIPTION:

XpansionTanks absorb any increased volume of water created by thermal expansion and maintain balanced pressure throughout a potable water supply system, such as water heaters and hot water storage tanks.



Conflex Risers

Item No.	Pipe Size MPT x IPS	Vertical Dimension
F1236	1/2" x 1/2" CTS	36"
F3436	3/4" x 3/4"	36"
F136	1" x 1"	36"
F11436	1-1/4" x 1-1/2"	36"
F11236	1-1/2" x 1-1/2"	36"
F236	2" x 2"	36"

Available in additional sizes.

Transition Risers

Item No.	Pipe Size MPT	Vertical Dimension
T3424	3/4"	24"
T3436	3/4"	36"
T124	1"	24"
T136	1"	36"
T114124	1-1/4" x 1"	24"
T11424	1-1/4"	24"
T11436	1-1/4"	36"
T11224	1-1/2"	24"
T224	2"	24"
T236	2"	36"
T336	3"	36"

FEATURES:

- Easy confirm to trench depth and flex with ground movement.
- Swivel feature allows easy tightening.
- Adapter is integral to the design to eliminate loose components.



FEATURES:

- Strong transition joint is stronger than PE Pipe installed.
- Utilizes O-ring design for added protection.
- Protected with electrostatically applied, fusion-bonded epoxy powder coating specifically designed for gas applications.



Constab Fitting & Tools

DESCRIPTION:

BigGuy[®] offers gas distribution fittings designed by Con-Stab-ID Seal[®] which allows for a seal to be maintained on the inside surface of a polyethylene pipe. These fittings offer a simple, cost-effective joining method, with no additional equipment requirements and uni-body design to eliminating all external parts.

Con-Stab Chamfer Tool

Item No.	PE Size	Test Gauge
0000-33-6580-04	1/2" CTS	Yes
0000-33-6580-13	3/4" IPS	Yes
0000-33-6580-14	1" IPS	Yes
0000-33-6580-10	1-1/4" IPS	Yes
0000-33-6580-16	1-1/2" IPS	Yes
0000-33-6580-17	2" IPS	Yes

Con-Stab Coupling

Item No.	PE Size	Wall
3259-52-1013-00	3/4" IPS	SDR-11
3259-52-1014-00	1" IPS	SDR-11
3259-52-1015-AA	1-1/4" IPS	SDR-11
3259-52-1016-00	1-1/2" IPS	SDR-11
3259-52-1017-00	2" IPS	SDR-11

Con-Stab Steel Transition Fitting

Item No.	PE Size	With Coupling
4646-00-1904-25	1/2" CTS	No
4646-00-1913-25	3/4" IPS	No
4646-00-1914-25	1" IPS	No
4646-00-1915-25	1-1/4" IPS	No
4646-00-1916-25	1-1/2" IPS	No
4646-00-1917-25	2" IPS	No
101051050800	3/4" IPS	Yes
101321320800	1" IPS	Yes
101661660700	1-1/4" IPS	Yes
101901900800	1-1/2" IPS	Yes
102382380800	2" IPS	Yes



Item No. PE

Con-Stab Tee

ltem No.	PE Size	
3259-50-1004-00	1/2" CTS	
3259-50-1013-00	3/4" IPS	
3259-50-1014-00	1" IPS	
3259-50-1015-AA	1-1/4" IPS	
3259-50-1016-00	1-1/2" IPS	
3259-50-1017-00	2" IPS	



BIGGUY

HUBBELL

OLYALL

Gas Distribution Products

Continent Industries

Con-Stab Elbow

Item No.	PE Size	
3259-51-1004-00	1/2" CTS	
3259-51-1013-00	3/4" IPS	
3259-51-1014-00	1" IPS	
3259-51-1015-AA	1-1/4" IPS	
3259-51-1016-00	1-1/2" IPS	
3259-51-1017-00	2" IPS	



Electro Fusion, Socket Fusion and Butt Fusion Fittings also available.



LYCOFIT[®] Fitting & Tools

DESCRIPTION:

BigGuy[®] offers LYCOFIT[®] mechanical fittings for connecting underground polyethylene gas pipe. Product is designed for maximum gripping power that eliminates the risk of pullout.

LycoFit[®] Coupling

Item No.	PE Size	
LC060Y-DER	OY-DER 3/4" IPS	
LC070Y-DER	1" IPS	
LC080X-DESR 1-1/4" IPS		
LC090Y-DESR	1-1/2" IPS	
LC200Y-DESR 2" IPS		



LycoFit® Mechanical 3-Way Tee

Item No.	PE Size	
LC060Y-M3T	3/4" IPS	
LC070Y-M3T	1" IPS	
LC080X-M3T	1-1/4" IPS	
LC090Y-M3T	1-1/2" IPS	
LC200Y-M3T	2" IPS	



LycoFit[®] Transition Fitting (Steel to PE)

Item No.	PE Size	
LC060S060Y-SPB	3/4" IPS	
LC070S070Y-SPB	1" IPS	
LC080S080Y-SPB	1-1/4" IPS	
LC090S090Y-SPB	1-1/2" IPS	
LC200S200Y-SPB	2" IPS	



LycoFit[®] Assembly Tools

ltem No.	Descriptoin		
QRP-100	1/2" CTS thru 1" IPS		
QRP-200	1/2" CTS thru 2" IPS		



Made by:

FEATURES:

- Strong connection with no slippage.
- Instant Visual Check Lycofit fittings allows for instant and easy quality check.
- 100% Leak-proof.
- Excellent durability.
- Easy to install with no measuring and calculating required.



Underground Marking Tape & Wire

DESCRIPTION:

BigGuy[®] offers both detectable and undetectable warning tape that is for underground utility identification and UL listed tracer wire used for locating buried pipe.

Detectable Tape

ltem No.	Color	Marking	Size
D2BW	Blue	Water	2" x 1000 FT
D2GS	Green	Sewer	2" x 1000 FT
D2YG	Yellow	Gas	2" x 1000 FT
D3BW	Blue	Water	3" x 1000 FT
D3GS	Green	Sewer	3" x 1000 FT
D3YG	Yellow	Gas	3" x 1000 FT
D6GS	Green	Sewer	6" x 1000 FT
D6BW	Blue	Water	6" x 1000 FT
D12BW	Blue	Water	12" x 1000 FT
D12GS	Green	Sewer	12" x 1000 FT

Non-Detectable Gas Tape

ltem No.	Color	Marking	Size
ND3OT	Orange	Telephone	3" x 1000 FT
ND3YG	Yellow	Gas	3" x 1000 FT
ND6YG	Yellow	Gas	6" x 1000 FT
ND6YG	Yellow	Gas	6" x 1000 FT

FEATURES:

• Manufactured for durability and corrosion resistance.

GII

Gas Distribution Products

- Temperature rated from -94°F to 200° F.
- Triple layer lamination.
- 5.0 mil thickness.




UL Listed Flexible Tracer Wire

Item No.	Color	Size	
APSS-1801-4-YP4-HC	Yellow	500 FT	
APSS-1801-4-150-HC	Yellow	150 FT	

Available in additional sizes.

FEATURES:

- 18-gauge AWG copper clad steel.
- PE insulated with a .030" nominal wall.
- UL listed for direct burial applications.
- Strong durability and corrosion resistance.





Pipe

DESCRIPTION:

BigGuy[®] medium-density polyethylene Yellow Gas Pipe is suitable for use in multiple applications for gas distribution. Available in 1/2-inch to 2-inch diameters, it comes coil lengths and can be installed by heat fusion or mechanical fittings.



Yellow Gas Pipe Coil

Item No.	Nominal Size	Feet/ Coil	
LP34150IPS	3/4"	150	
LP34500IPS	3/4"	500	
LP1150IPS	1"	150	
LP1500IPS	1"	500	
LP114150IPS	1-1/4"	150	
LP112150IPS	1-1/2" 150		
LP2150IPS	2"	150	

Available in additional sizes.



FEATURES:

- Superior resistance to most solvents and chemicals it is likely to encounter in natural and manufactured gas.
- Is non-corroding against gas and external galvanic soil conditions.
- Resists UV degradation when exposed to direct sunlight.
- Resists slow crack growth.
- Can be cut with simple pipe and tubing cutters, allowing for savings in labor and equipment.
- Reduces the cost of manpower required for installation due to its light weight and ease in transport and handling, as well as long laying lengths.

Regulators

DESCRIPTION:

BigGuy[®] Gas Regulators provide line pressure and appliance gas stability and are available in models appropriate for a variety of residential and light commercial applications.

Regulators

Model	Description	Case Qty.	Max PSI
4411900002	1/2" Natural Gas Line Pressure, 2 PSI	20	2
4411900004	1/2" Propane Gas Line Pressure, 2 PSI	20	2
4412900002	3/4" Natural Gas Line Pressure, 2 PSI	20	2
4412900003	3/4" Propane Gas Line Pressure, 2 PSI	20	2
4412900025	1" Natural Gas Line Pressure	20	2
4412900026	1" Propane Gas Line Pressure	20	2

Sold in case quantities only.

FEATURES:

- Line pressure and gas appliance regulator for inlet pressure up to 2 PSI.
- Precise regulating control of both full flow and lower pilot flows of gas.
- Available in natural gas and propane gas models.
- Includes a vent limiter made of brass required for indoor use and spaces where gas escapement requirements are in place.
- Housing made of rugged die-cast aluminum.
- Diaphragm and washer made of combustible gas resistant nitrile rubber.

Contact representative for product availability.









Need repair parts for Water Heaters? Pumps & Circulators? Plumbing Fixtures? TailWind[™] can fill all of your needs!

A.O. Smith • State • American • Armstrong • Bradley • Watts



THE WHOLESALER'S SOURCE



Repair Parts

DESCRIPTION:

Tailwind[™] offers various repair parts including parts for water heaters, pumps, circulators, and plumbing fixtures. Common parts are listed below but many additional parts are available.



Preferred

Construction

65

TailWind[™] can supply any of your repair part needs. Please check with your PCP representative for availability.

Water Heater Repair Parts

For AO Smith, State, and American Water Heaters.

Many more available, but some available parts include:

- Burner Assembly
- Parts

- Pilot Assembly Elements
- Blower Assembly

• Ignitors

Gas Valves •

•

Find your parts by serial number at: http://www.waterheaterparts.com/

Pump & Circulator Repair Parts

For Armstrong pumps and circulators.

Many more available, but some available parts include:

- Seal & Bearing
- Flanges Couplers
- Assembly Gaskets

Bradley Repair Parts

For Bradley plumbing fixtures.

Many more available, but some available parts include:

Faucet Stems Cap Ends Solenoids •



Please contact your PreferredConstructionProducts® account manager for purchasing and pricing information.

PCP-CAT006-01042024 © 2024 PCP - All Rights Reserved

- Thermostats Anodes •
- Tankless Heater
- **Product Preserver** Systems
- Aquasana

Impellers

PreferredConstructionProducts[®] represented by







PreferredConstructionProducts® offers professional grade products for the building trades.

PreferredConstructionProducts® is proudly represented by: Hugh M. Cunningham Companies in Arkansas, Louisiana, Mississippi, New Mexico, Oklahoma, and Texas.

For more information or to place an order for PreferredConstructionProducts[®] offerings, please contact PCP Customer Service:

info@PreferredConstructionProducts.com

www.PreferredConstructionProducts.com

Your local PreferredConstructionProducts® sales representative who can provide purchasing and price information is:

PreferredConstructionProducts* is not responsible for typographical or printing errors that may be contained in this catalog.